




**US Army Corps
of Engineers**
Waterways Experiment
Station

Contract Report CERC-95-2
August 1995

Shoreline and Sediment Volume Changes at the Colorado River Mouth, Texas

by *Guoxiong Liang,*
Scripps Institution of Oceanography

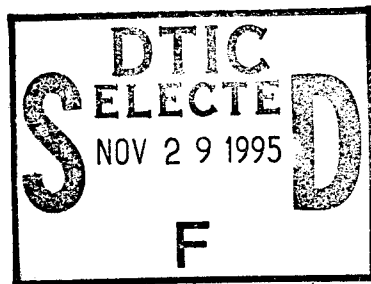

DTIC
SELECTED
NOV 29 1995
F

Approved For Public Release; Distribution Is Unlimited

19951122 061

DTIC QUALITY INSPECTED 1

Prepared for Headquarters, U.S. Army Corps of Engineers

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.



PRINTED ON RECYCLED PAPER

Shoreline and Sediment Volume Changes at the Colorado River Mouth, Texas

by Guoxiong Liang

Scripps Institution of Oceanography
University of California, San Diego
La Jolla, CA 92093-0222

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

Final report

Approved for public release; distribution is unlimited


Prepared for U.S. Army Corps of Engineers
Washington, DC 20314-1000

Under Work Unit 22113

Monitored by U.S. Army Engineer Waterways Experiment Station
3909 Halls Ferry Road, Vicksburg, MS 39180-6199



**US Army Corps
of Engineers**
Waterways Experiment
Station

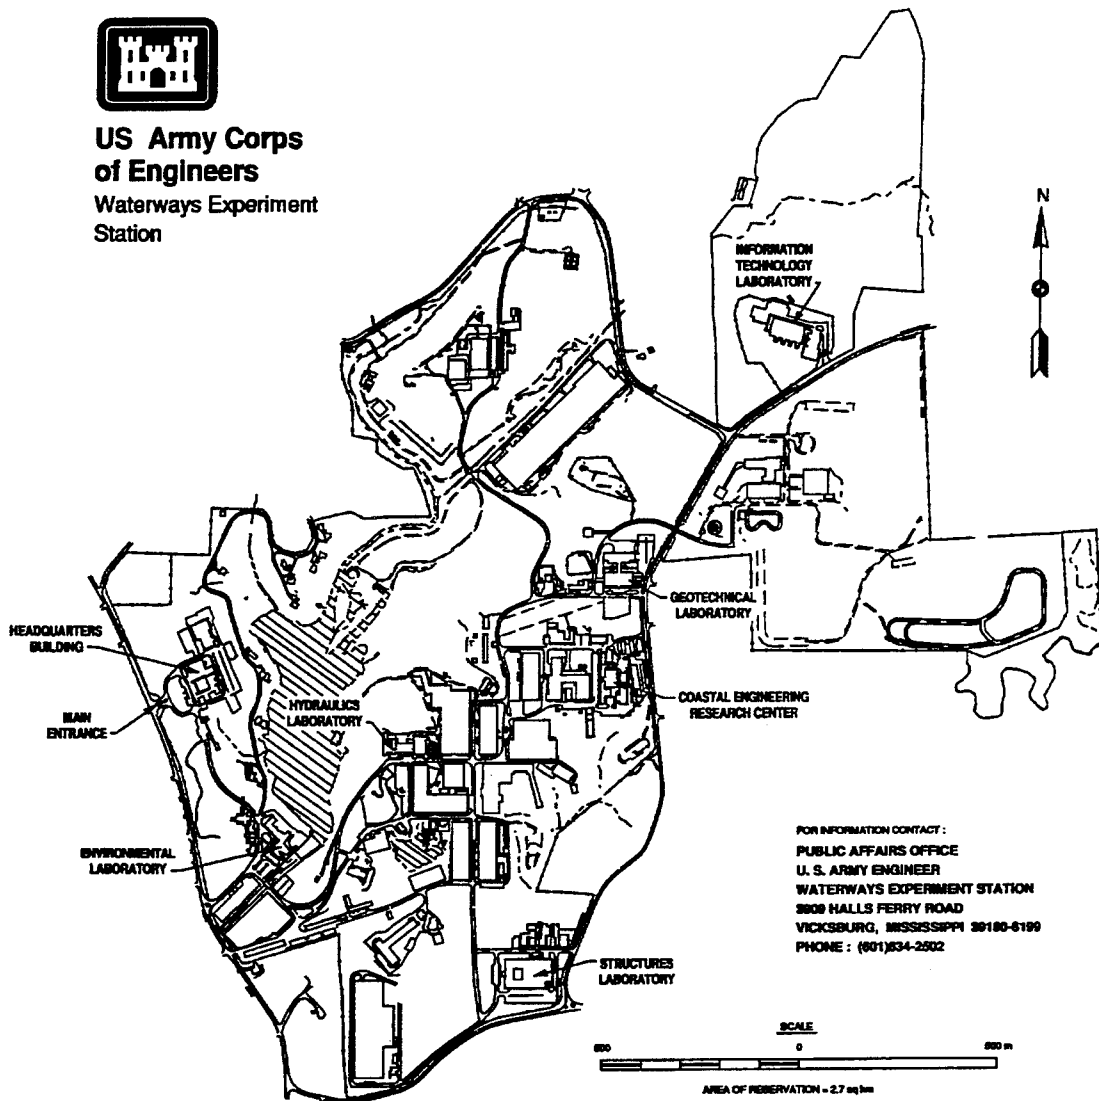

FOR INFORMATION CONTACT :
PUBLIC AFFAIRS OFFICE
U. S. ARMY ENGINEER
WATERWAYS EXPERIMENT STATION
8809 HALLS FERRY ROAD
VICKSBURG, MISSISSIPPI 39180-6199
PHONE : (601)834-2502

Waterways Experiment Station Cataloging-in-Publication Data

Liang, Guoxiong.

Shoreline and sediment volume changes at the Colorado River mouth, Texas / by Guoxiong Liang ; prepared for U.S. Army Corps of Engineers ; monitored by U.S. Army Engineer Waterways Experiment Station.

38 p. : ill. ; 28 cm. — (Contract report ; CERC-95-2)

1. Shorelines — Texas — Colorado River. 2. Sediment transport — Texas — Colorado River. 3. Beach erosion — Texas — Colorado River. I. United States. Army. Corps of Engineers. II. U.S. Army Engineer Waterways Experiment Station. III. Coastal Engineering Research Center (U.S. Army Engineer Waterways Experiment Station) IV. Title. V. Series: Contract report (U.S. Army Engineer Waterways Experiment Station) ; CERC-95-2.

TA7 W34c no.CERC-95-2

Contents

Preface	vi
1—Introduction.....	1
Background.....	1
General Setting of the Study Area.....	1
History of Shoreline in the Vicinity of the Colorado River Mouth.....	3
Data Availability.....	4
2—Shoreline and Sediment Volume Changes in the North Section.....	9
Changes in Shoreline.....	9
Changes in Sediment Volumes.....	10
3—Shoreline and Sediment Volume Changes in the South Section.....	14
4—Complex Principal Component Analysis of Bathymetric Data	16
Background.....	16
Analysis Method of CPCA.....	17
Analysis Results.....	19
5—Principal Component Analysis of Volume Changes.....	23
Choosing Volume Variations as Variables.....	23
Results and Discussion.....	24
6—Conclusions	27
References.....	28
Appendix A: Calculation Procedures for Sediment Volume Changes.....	A1

List of Figures

Figure 1.	Locality Map of Colorado River mouth, Texas	2
Figure 2.	Positions of profiles in the north section and the south section.....	5
Figure 3.	Shoreline changes at the north section, from 1984 to 1992	10
Figure 4.	Accretion and erosion at each profile in the north section.....	11
Figure 5.	Volume changes in the north section from December of 1990 to January of 1992.....	13
Figure 6.	Comparison between elevations of 1984 and 1992 along Profile SJ1	15
Figure 7.	Volume changes in six profiles near the south jetty from 1991 to 1992	15
Figure 8.	Variation of profile NJ00+2/3 during a storm.....	17
Figure 9.	The Observed Data versus the reconstructed results derived from the first and second complex principal components.....	20
Figure 10.	Volume changes in three profiles near the north jetty, January 9 to January 21, 1992.....	24
Figure 11.	Volume changes in two profiles versus the first and second principal components	25
Figure A1	Schematic of calculating volume changes in a profile.....	A2

List of Tables

Table 1.	Availability of Bathymetric Data in the North Section.....	7
Table 2.	Availability of Bathymetric Data in the South Section.....	8
Table 3.	Changes in Volume in the North Section.....	12
Table 4.	Percentage of Variation Explained by Principal Components.....	19

Table 5.	Variation in Volumes Explained by Principal Components.....	24
----------	---	----

Preface

This report is a contract final report on the changes in shoreline and sediment transport at the Colorado River mouth, Texas, in partial fulfillment of Contract No. DACW39-90-K-0007 with Waterways Experiment Station's (WES) Coastal Engineering Research Center (CERC).

The data for the report were collected from 1990 to 1992 by CERC's Prototype Measurement and Analysis Branch Personnel with Principal Investigator Dr. Thomas E. White in Work Unit 22113 "Mouth of the Colorado River, Texas" in the Monitoring Completed Coastal projects (MCCP) program at CERC.

This report was prepared by Mr. Guoxiong Liang, Research Assistant, at Scripps Institution of Oceanography (SIO), University of California at San Diego (UCSC), under the direct supervision of Dr. Richard J. Seymour, Research Engineer, SIO, UCSD.

Technical oversight and cooperation were performed by the project Principal Investigator, Dr. Thomas E. White, at CERC.

WES supervisors during this report's preparation were Branch Chief, William L. Preslan; Division Chief, Thomas W. Richardson; Program Manager, Carolyn M. Holmes; Assistant Director of CERC, Charles C. Calhoun, Jr.; Director of CERC, Dr. James R. Houston.

At the time of publication of this report, Director of WES was Dr. Robert W. Whalin. Commander of WES was COL Bruce K. Howard, EN.

1 Introduction

Background

This report is a part of the final report for the study on the changes in shoreline and sediment transport at the Colorado River mouth, Texas, prepared for the US Army Engineer Waterways Experiment Station's (WES's) Coastal Engineering Research Center (CERC). The data for the report were collected by the Monitoring Completed Coastal Projects (MCCP) program Colorado River work unit.

The purposes of this study are to estimate the efficiency of some coastal projects such as jetties and weir, to test the performance of several longshore sediment transport formulas, and to test surf zone wave-and-current models and shoreline response models.

General Setting of the Study Area

The Colorado river mouth is located at 28°35.5'N latitude and 95°59'W longitude. The Colorado River, cutting across the Matagorda Peninsula, discharges into the Gulf of Mexico (Figure 1).

The Colorado River, Texas, has a length of about 1,550 km and its drainage basin is about $108.2 \times 10^3 \text{ km}^2$. With an annual water discharge of about $2.2 \times 10^9 \text{ m}^3$ (Aronow and Kaczorowski, 1985), the Colorado River contributes about $7.1 \times 10^6 \text{ m}^3$ of suspension load to Matagorda Bay and the Gulf of Mexico (MaGowen and Brewton 1975).

Tides in the northern Gulf of Mexico are chiefly diurnal, with an average range of 0.6 m and a maximum of 0.9 m (Aronow and Kaczorowski 1985).

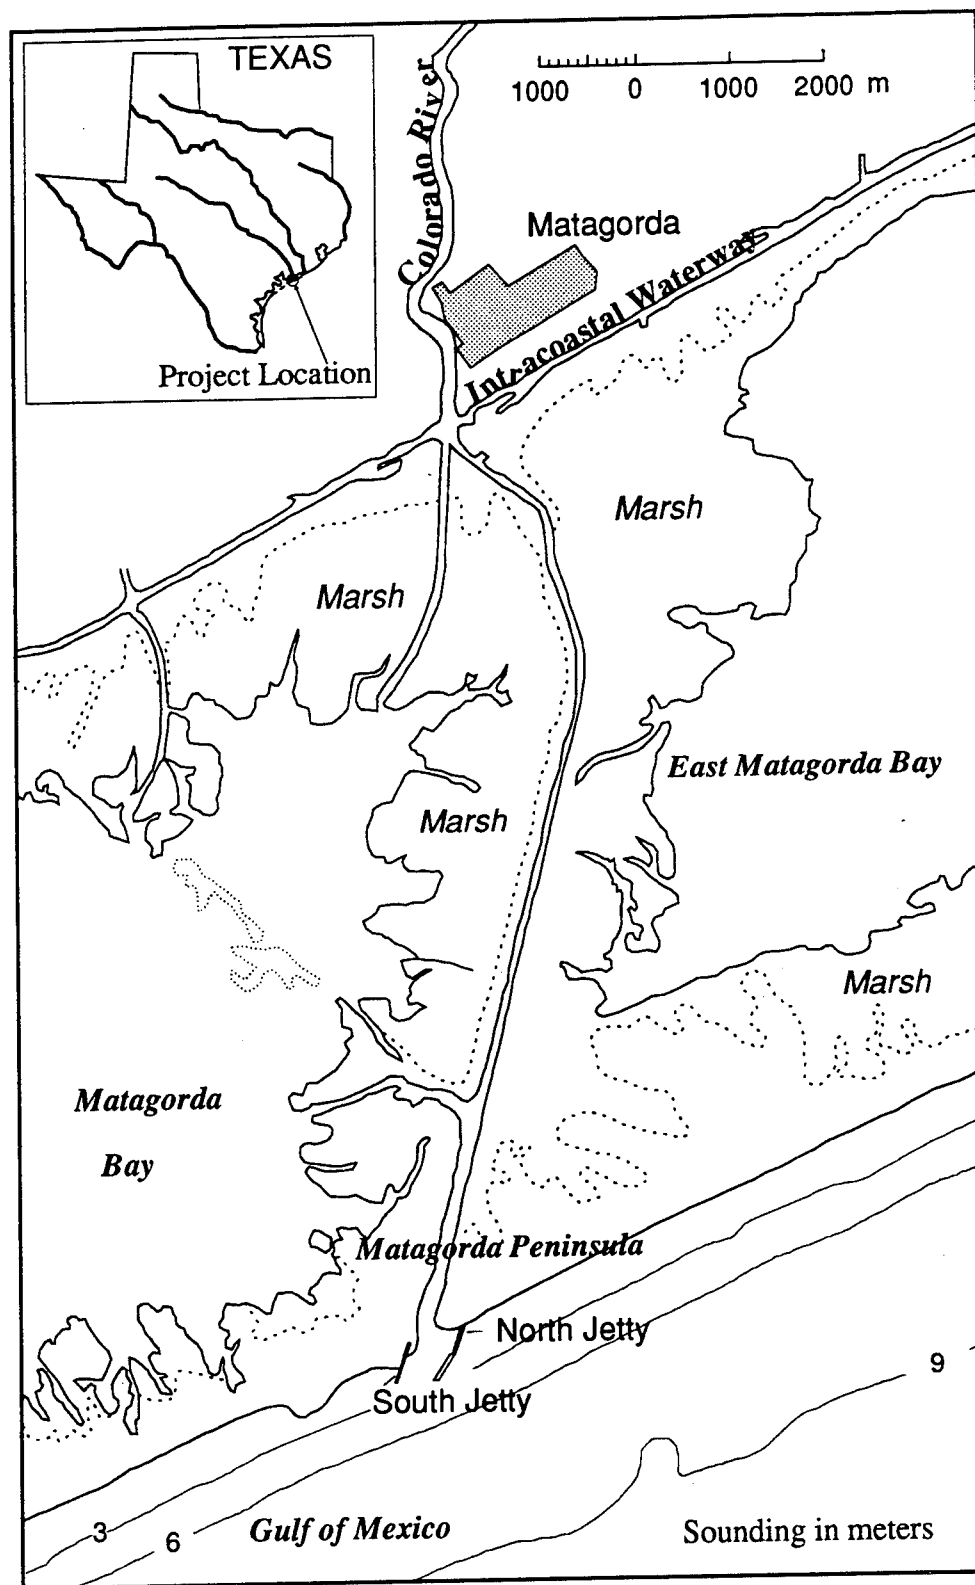


Figure 1. Locality map of Colorado River mouth, Texas

In tidal inlets, tidal currents are an important mechanism for sediment transport.

The Texas coast, with an orientation of SW-NE, is wave-dominated (Hayes 1965). The prevailing wind is from the southeast quadrant. Most waves reach the shoreline at an angle. Accordingly, a longshore current that moves sediment to the southwest is created (MaGowen and Brewton 1975). The Matagorda Peninsula ranges in width from 1,200 to 1,600 m, and has an average elevation of about 2 m. The gulf shoreline, orienting roughly SWW-NEE, is generally linear. The contours are roughly parallel to the shoreline.

History of Shoreline in the Vicinity of the Colorado River Mouth

Because of the existence of barrier islands, the shoreline nearby the Colorado River mouth consists of a mainland shoreline (inner shoreline) and a Gulf shoreline (outer shoreline). The mainland shoreline, facing bays behind the barrier islands, is irregular and devoid of beach; whereas the Gulf shoreline is very regular with well-developed sand beach (LeBlanc and Hodgson 1959).

During the last Pleistocene glaciation, sea level in the Gulf of Mexico was lowered approximately 120 m (Curry 1960). The mainland shoreline, which is believed to have originated in this stage, was probably 80 to 224 km seaward from the present one (LeBlanc and Hodgson 1959). Sea level started to rise about 18,000 years B.P. As the sea level rises, the mainland shoreline gradually migrates landward.

Sea level reached its present position around 3,000 years B.P. A remarkable feature associated with the sea level stillstand was the formation of a series of barrier islands that gave the rising of the Gulf shoreline (LeBlanc and Hodgson 1959).

Prior to the time of sea level stillstand, the Colorado River was discharging into an estuary that was shared with the Brazo River. The estuary had an estimated average depth of 7.6 m, a width of 48 km, and a length of 35 km (MaGowen and Brewton 1975). As the rate of sea level rise decreased, the Colorado and Brazo Rivers completely filled their common estuary (Wilkinson and Basse 1978). According to MaGowen and Brewton, about

1,000 years ago, the Colorado River began discharging into Matagorda Bay in the vicinity of the small town of Matagorda.

The Colorado River built its delta across Matagorda Bay, a distance of about 6.4 km, from 1929 through 1935 (Wadsworth 1966). The delta, which covered 0.2 km² (45 Acres) in 1908 and 7.2 km² (1780 acres) in 1930, attained an area of 28.7 km² (7098 acres) by 1941. The rapid deposition was caused by the removal of a log jam that extended 74 km upstream from the town of Matagorda. A great amount of sediment had accumulated in the river downstream to the jam because of the significantly reduced flow. Upon the release of the jam in 1929, sediment was quickly transported to Matagorda Bay, creating a delta that prograded completely across the bay. In 1936, a channel was dredged through the Matagorda Peninsula, and the Colorado River began discharging into the Gulf of Mexico.

Data Availability

The bathymetry survey for this study was designed on the context of the data of the 1984 survey. In the northeast bank of the river mouth (the north section), eight cross-shore profiles (NJ0 through NJ7) were selected (Figure 2, upper). In the southwest bank (the south section), five profiles, SJ0 through SJ4, were selected (Figure 2, lower). All these 1984 profiles were defined as principal profiles.

In the north section, all the bench marks were located in a straight base line that was set roughly on the top of a series of sand dunes. Profile lines were perpendicular to the base line. The distance between two neighboring principal profiles was 457.2 m while that between NJ0 and NJ1 was 353.6 m. From the north jetty, the north section extended about 3,200 m alongshore. Within each of the two sections that were respectively between NJ0-NJ1 and NJ1-NJ2, two additional profiles were inserted. While one profile was added to the mid-points between NJ2-NJ3 and NJ3-NJ4, respectively.

In the south section, the distance between two neighboring principal profiles was 457.2 m. Between SJ0 and the south jetty, three profiles were added. Another profile was inserted between SJ0 and SJ1. The total longshore length of the south section was about 2,286 m.

The elevations of the nearshore profiles were measured using a system consisting of a laser GEODIMETER and a 6-m-high sled. At the same time as

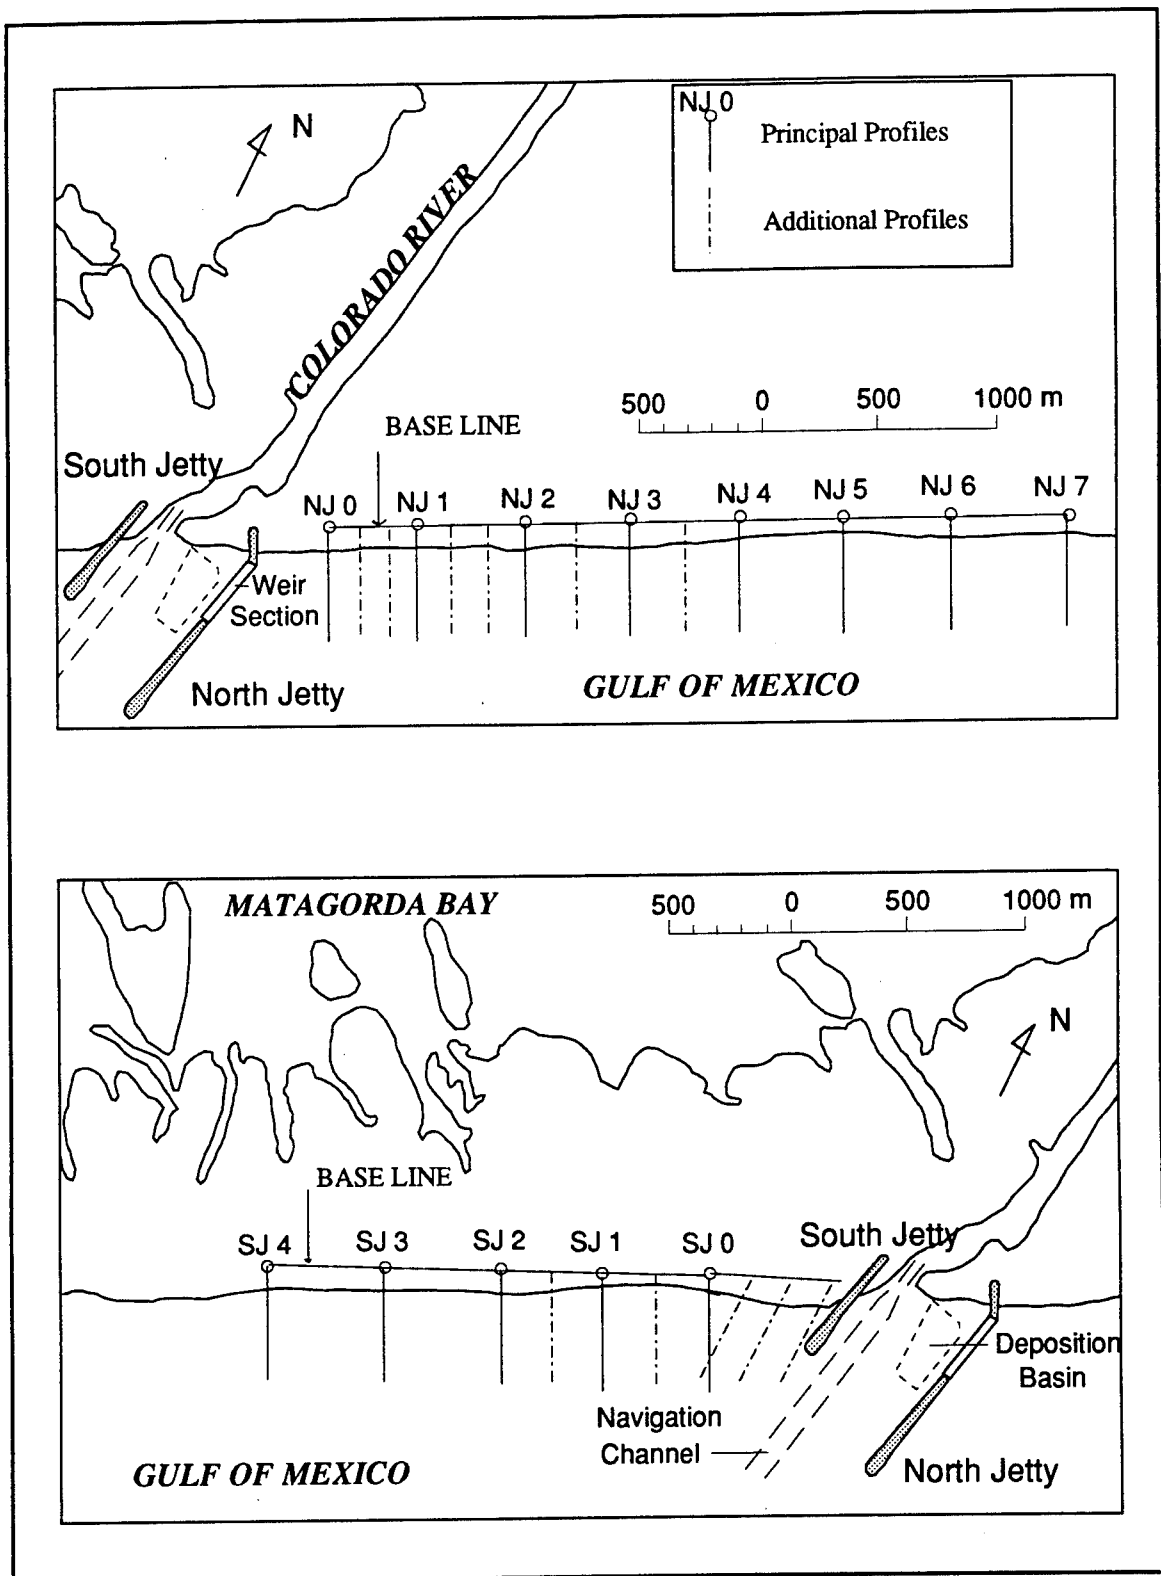


Figure 2. Positions of profiles in the north section(upper) and the south section (lower).

the bathymetric survey, several tripods or sleds that carried pressure sensors, electromagnetic current meters (ECM) and optical backscatter sensors (OBS) were located in the surf zone along profile NJ0.

The bathymetric data were processed by the Interactive Survey Reduction Program (ISRP), a program for personal computers (Birkemeire 1984a). The data, comprised profiles with uneven-spaced grid points, were converted into profiles with even-spaced grid points by means of biharmonic interpolation.

In the north section, data were collected in December of 1990, July of 1991, and January of 1992. The data available from each profile is listed in Table 1.

In the south section, beach profiles were measured in July of 1991 and January of 1992. The outmost points of the profile reach the shoreline (Table 2).

From January 9 to January 18 of 1992, three profiles (NJ00+2/3, NJ0 and NJ0+1/3) near the north jetty were measured daily using leveling and measuring rod. On January 21, these profiles were measured by the laser GEODIMETER system. During this period, a storm reached the study area and caused significant variation in the beach morphology. This process was well documented in the data.

Table 1
Availability of Bathymetric Data In the North Section¹

Profile Number (1)	Location (m)	December of. 1990		July of 1991		January of 1992		Profile Number(2)
		D1	D2	D1	D2	D1	D2	
NJ 0	0	35	770	0	425	0	160	100
NJ 0+1/3	117.9	90	780	10	390	10	150	103
NJ 0+2/3	235.7	90	765	40	450	10	150	107
NJ 1	353.6	90	760	15	400	0	840	110
NJ 1+1/3	506.0	5	700	15	90	5	850	113
NJ 1+2/3	658.4	0	665	10	85	10	840	117
NJ 2	810.8	0	665	0	85	10	870	120
NJ 2+1/2	1139.9	20	650	25	75	0	840	125
NJ 3	1268.0	0	730	0	90	0	865	130
NJ 3+1/2	1497.1	75	710	15	85	40	820	135
NJ 4	1725.2	0	690	0	75	10	895	140
NJ 5	2182.4	70	740	0	70	0	795	150
NJ 6	2639.6	-	-	25	75	30	840	160
NJ 7	3096.8	15	775	0	90	0	795	170

¹ 'Profile numbers(1)' were survey number; 'Profile numbers(2)' were numbered by ISRP; 'Location' is the longshore distance (northwards) from the NJ0 profile line; 'D1' indicates the distance from the base line to the inland end of a profile while 'D2' indicates that to the offshore end.

Table 2
Availability of Bathymetric Data in the South Section¹

Profile Number (1)	Location (m)	December of. 1990		July of 1991		January of 1992		Profile Number(2)
		D1	D2	D1	D2	D1	D2	
SJ 00	-457.2	–	–	175	240	0	260	290
SJ 00+1/3	-304.8	–	–	50	230	45	250	293
SJ 00+2/3	-152.4	–	–	80	225	80	225	297
SJ 0	0	–	–	75	200	0	160	200
SJ 0+1/2	+228.6	–	–	75	220	0	160	205
SJ 1	+457.2	–	–	40	210	0	160	210
SJ 2	+914.4	–	–	50	200	–	–	220
SJ 3	+1371.6	–	–	0	180	–	–	230
SJ 4	+1828.8	–	–	40	160	–	–	240

¹ Location is the longshore distance from SJ0 profile line; '-' indicates northwards while '+' indicates southwards; For the other representations, refer to Table 1.

2 Shoreline and Sediment Volume Changes in the North Section

Changes in Shoreline

By comparing the data of 1984 and 1990, it is obvious that the shoreline in the north section had undergone an accretion process. At each principal profile (except NJ0 that remained unchanged), the shoreline migrated seawards (Figure 3).

The data in January of 1992 indicated that the shoreline retreated from the position of 1990. This erosion is believed to have resulted from the strong waves caused by the storm. However, the 1984 shoreline had been eroded in only two positions, .

From Figure 4a, it can be found that the most intensive accretion from 1984 to 1990 happened at profile NJ1 and the average accretion distance was 19.2 m. In addition to that at NJ0, accretions at NJ5 and NJ7 were below the average value. From 1984 to 1990, an area of 63,000 m² was gained within the north section.

In comparison with the 1984 shoreline, the accretion in January of 1992 at NJ1 was still the maximum in the north section (Figure 4b). The average accretion over the 1984 shoreline was 8.8 m. Despite the erosion event (that probably was a short-term phenomenon), the area above sea level was 30,000 m² larger than that in 1984.

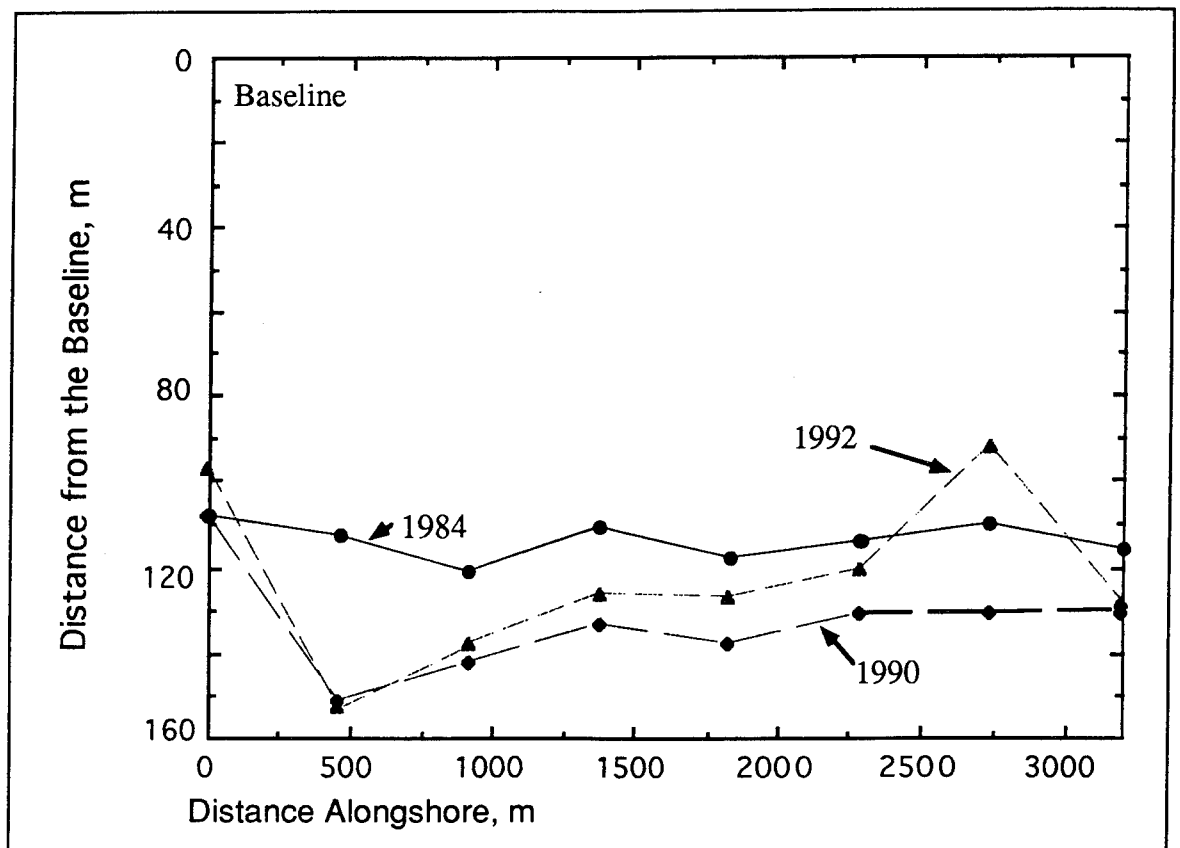



Figure 3. Shoreline changes at the north section, from 1984 to 1992

Changes in Sediment Volumes


Following the procedures explained in the Appendix, the volume change per unit longshore length (m^3 per m) can be estimated.

Each 1984 profile extended 125 m offshore from the base line. The offshore ends of the profiles were roughly located on a longshore sand bar. The volume changes in this section are listed in Table 3. At NJ0, the erosion was significant. However, all the other profiles, either in 1990 or in 1992, showed accretion over 1984. In 1990, the accretion rate ranged from 24.56 to 74.09 m^3 per m while in 1992 that ranged 30.09 to 66.02 m^3 per m.

The volume change in the entire section can be calculated using (A4) and (A5). From 1984 to 1990, the volume increased by about 135,000 m^3 .

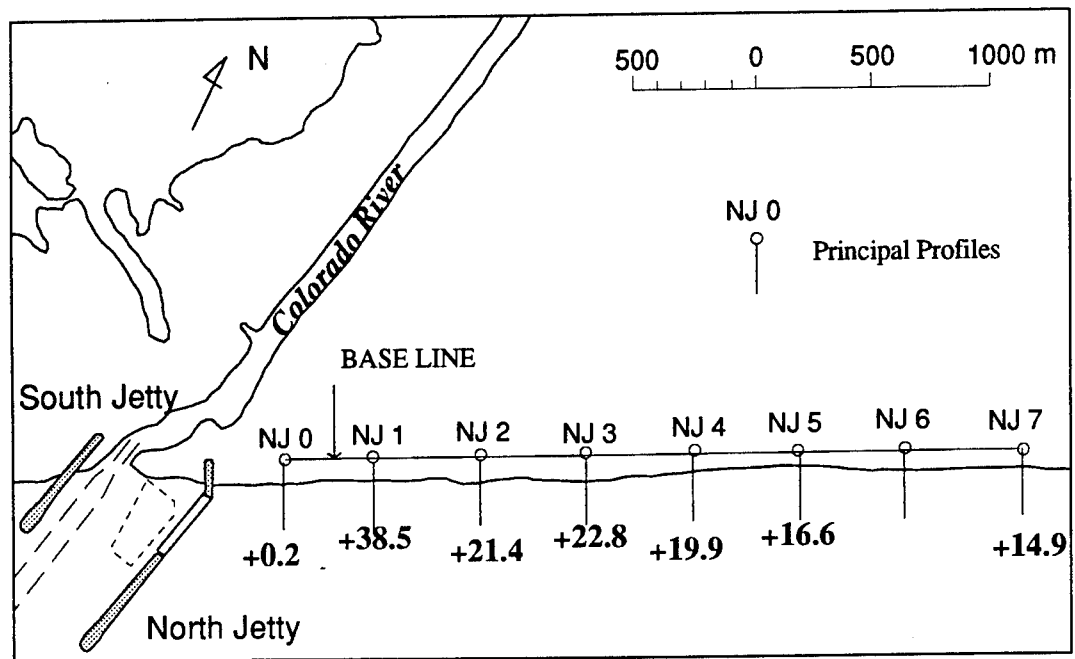

(a) 1990 vs. 1984

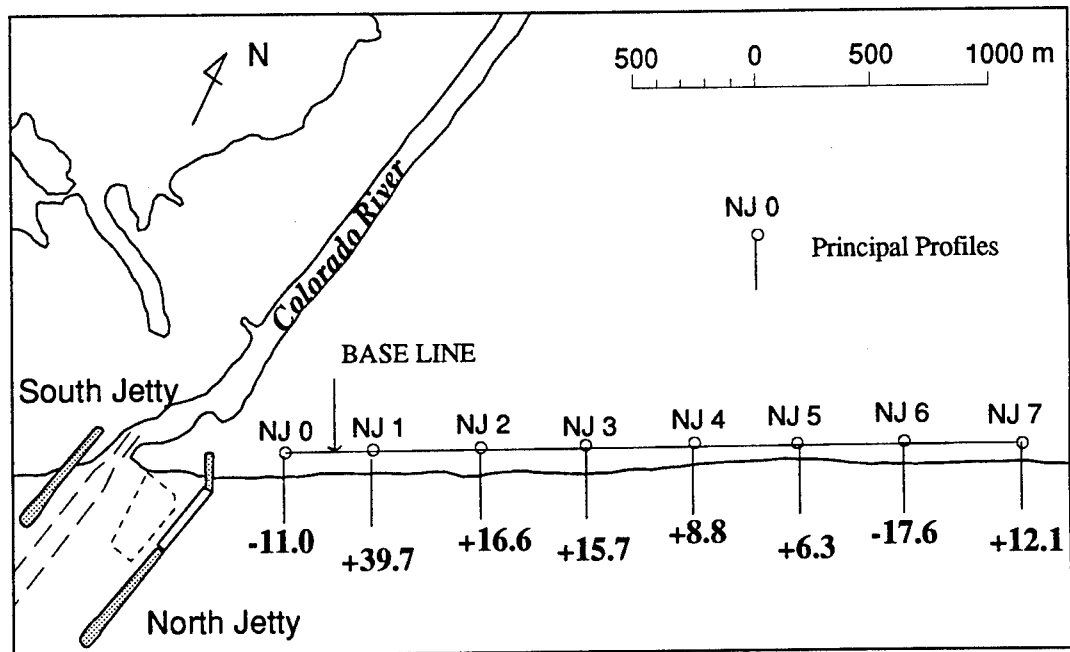

(b) 1992 vs. 1984

Figure 4. Accretion and erosion at each profile in the north section

Referring to Table 3, it is suggested that the erosion event of 1992 also affected the sediment volume. The principal profiles near the jetty underwent erosion in comparison with the data of 1990. The total volume eroded was estimated as 19,000 m³.

Table 3
Changes in Volume in the North Section¹
(0-125 m from Base Line)

Profile	NJ 0	NJ 1	NJ 2	NJ 3	NJ 4	NJ 5	NJ 6 ²	NJ 7
'90 vs. '84	-88.09	+65.75	+74.09	+61.82	+41.08	+46.18	—	+24.56
'92 vs. '84	-97.04	+63.64	+66.02	+42.22	+31.99	+47.64	+30.09	+34.69
'92 vs. '90	-8.95	-2.11	-8.07	-19.6	-9.09	+1.46	—	+10.13

¹ '+' Indicates accretion while '-' indicates erosion.

² Data from 1990 survey were unavailable at this profile.

Generally, the accretion in the north section was obvious. Located at the updrift part of the jetty, this section was trapping the sediment carried by the longshore current and blocked by the north jetty. The tendency agreed with the analysis of MaGowen and Brewton (1975).

The surveys in 1990 and 1992 extended to about 700 m offshore. At the same time, six additional profiles were inserted into several principal profiles. The volume changes in these longer profiles differed from that listed in Table 3. For example, principal profile NJ5 showed slight accretion in the upper 125 m, while the whole profile underwent erosion (Figure 5). The erosion values also implied that there was severe erosion happening in the underwater parts of most profiles. The total sand eroded was about 84,600 m³, which was as much as four times of that in the upper 125-m section.

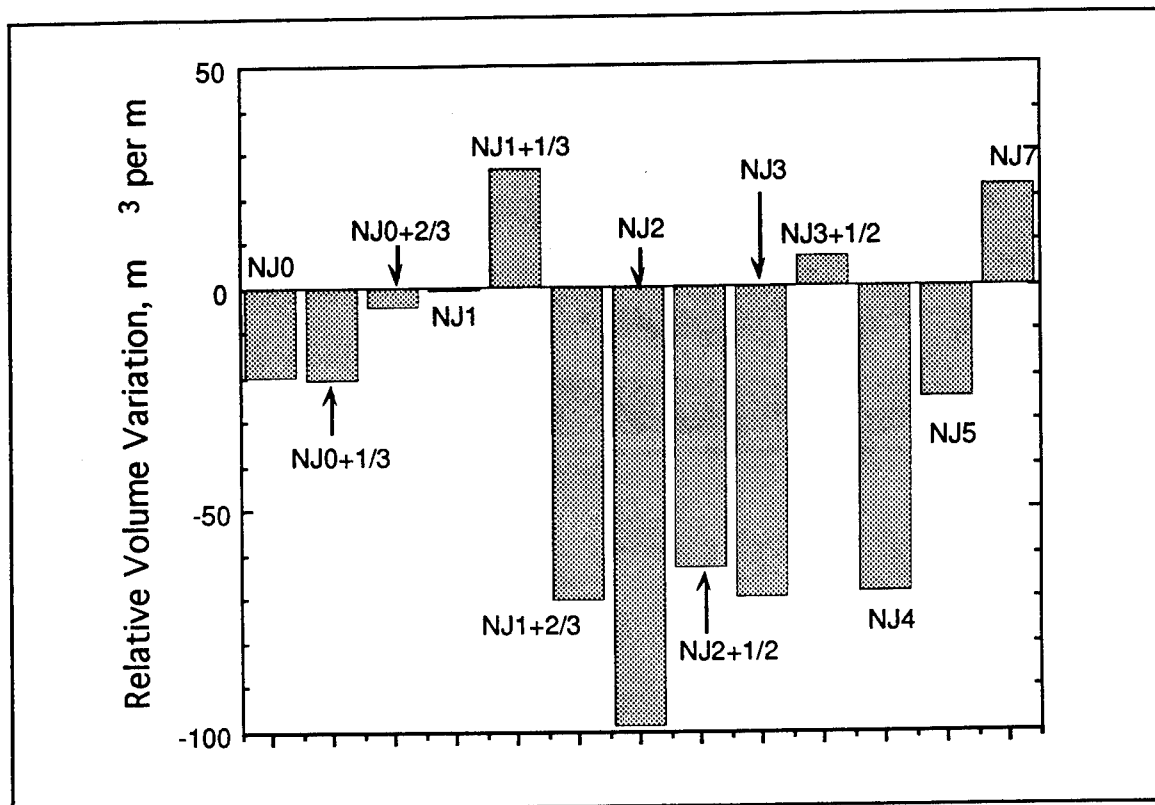


Figure 5. Volume changes in the north section from December of 1990 to January of 1992 (from the baseline to 700 m offshore)

3 Shoreline and Sediment Volume Changes in the South Section

Restricted by weather, transportation and other technical difficulties, the survey in the south section was not as successful as that in the north section. The survey in July of 1991 covered only the area from the shoreline up to the base line while the survey in January of 1992 measured only several profiles near the south jetty.

Due to the inability to recover the bench marks of some principal profiles, some data collected in this study did not match the data of 1984 either in locations or in reference elevations. Figure 6 shows one of the examples of them. The profile SJ1 of 1984 indicated that near the base line there was a 2-m-high terrace that was not supposed to change dramatically. In contrast, in the same profile of 1992, no terrace appeared. Furthermore, none of the elevations seemed to match. Similar situations made a considerable amount of data unuseable.

Based on the analysis of the data at SJ0, the shoreline migrated seawards from 1984 to 1992. However, the profile line in this study was too short to determine the length of extending.

There were six profiles (SJ00, SJ00+1/3, SJ00+2/3, SJ0, SJ0+1/2, and SJ1) that could be used for estimating volume changes from 1991 to 1992. The results showed that all the profiles, which extended from the foot of a bluff to the shoreline, were being eroded (Figure 7). The maximum erosion was at profile SJ0+1/2. The total volume eroded in this 900-meter longshore section was about 22,100 m³.

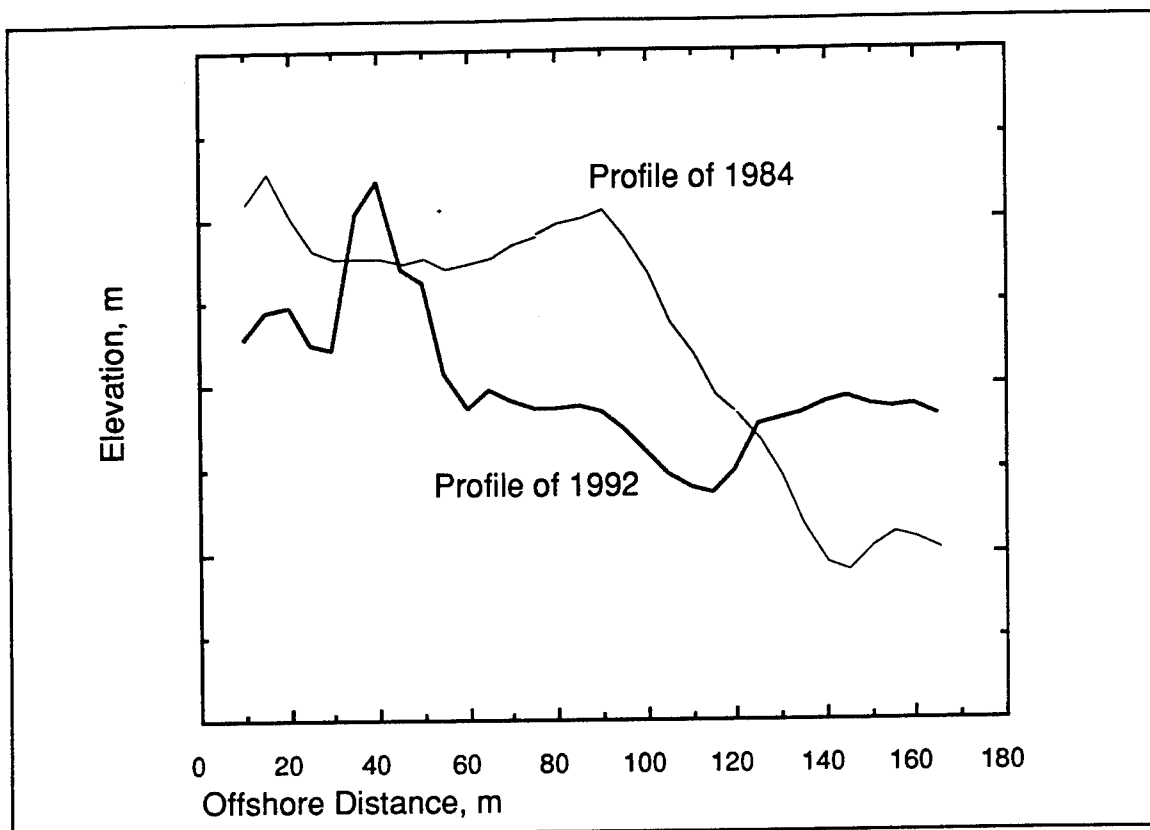


Figure 6. Comparison between elevations of 1984 and 1992 along profile SJ1

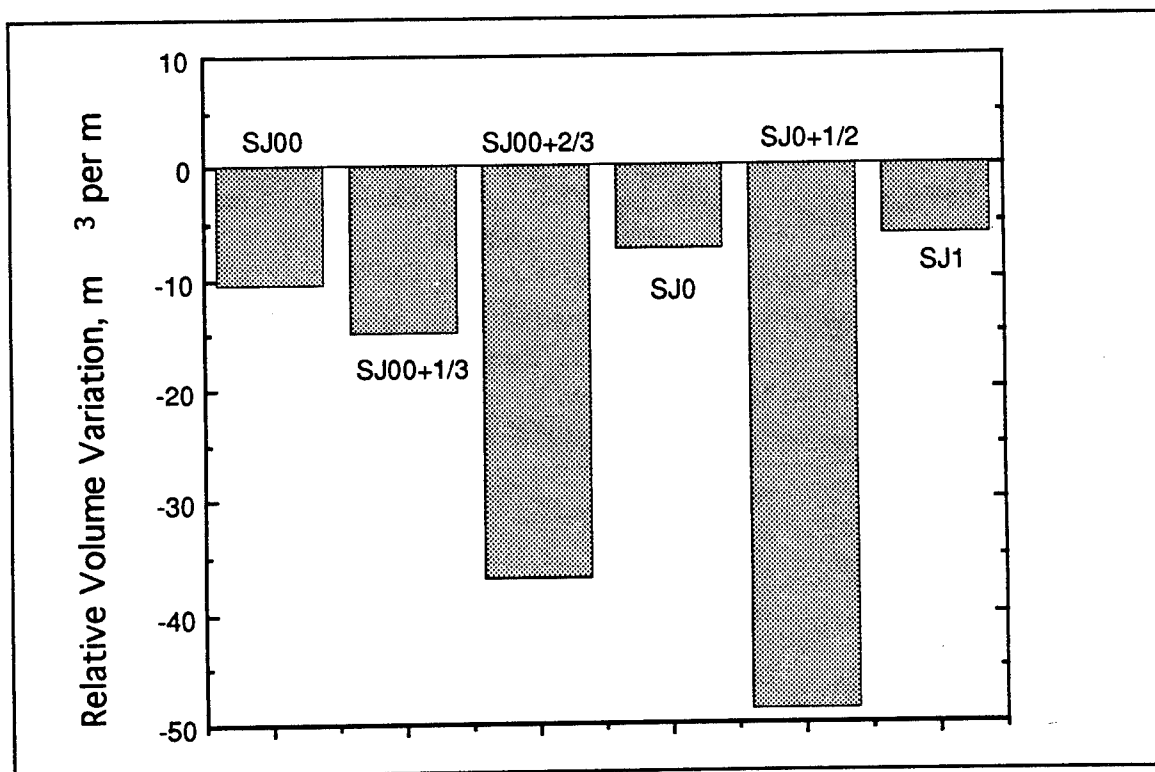


Figure 7. Volume changes in six profiles near the south jetty from 1991 to 1992

4 Complex Principal Component Analysis of Bathymetric Data

Background

Principal component analysis (PCA), also known as the Empirical Orthogonal Function (EOF) technique, has been widely applied to the analysis of the variations in beach morphology (e.g., Winant *et al.* 1975; Aubrey *et al.* 1980; Birkemeier 1984b; Seymour 1989). The primary advantage of the PCA is its ability to compress the complicated variability of the observed data set into the fewest possible modes. It provides an efficient and objective means for describing the variation of a beach profile with time. However, it must be recognized that there is a major disadvantage of conventional PCA. Although capable of describing standing waves in data, it can not detect propagating waves (Horel 1984). Therefore, PCA cannot identify a coherent form that moves through the data, such as a rapidly moving bar.

Complex principal component analysis (CPCA), developed for meteorological application (e.g., Wallace and Dickson 1972; Barnett 1983), has been successfully used to describe an event of a fast-moving sandbar (Liang and Seymour 1991). In comparison with the conventional PCA, CPCA offers significant advantages. Besides being able to give a more compact description for the variation of the data set (fewer functions required), it can also detect propagating waves.

During mid-January of 1992, a storm struck the study area. The morphology variation during pre- and post-storm period was well reflected by three daily wading profiles which were NJ00+2/3, NJ0 and NJ0+1/3. In the profile NJ00+2/3, the strong waves caused a sand bar migrating more than 20

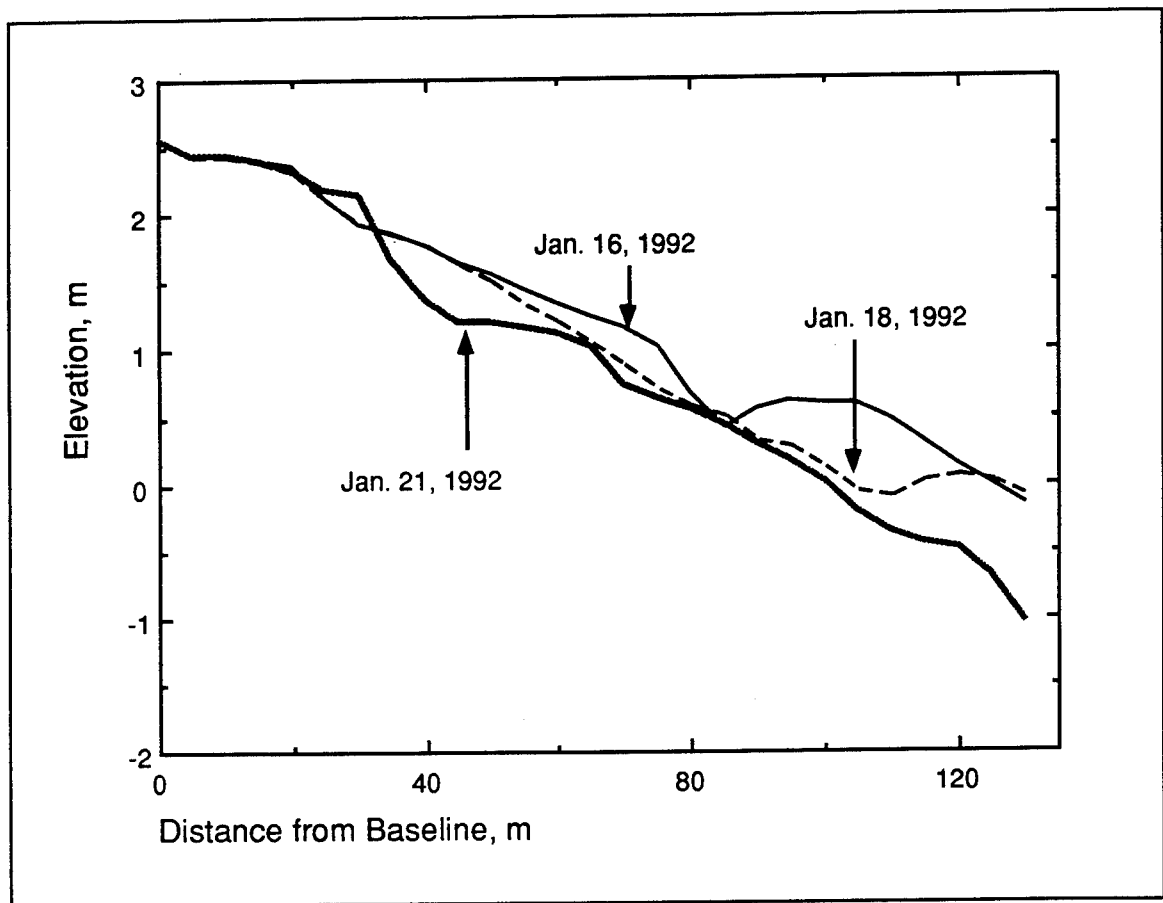


Figure 8. Variation of profile NJ00+2/3 during a storm

m in two days (Figure 8). These data provided a good basis for testing the efficiency of PCA and CPCA.

Analysis Method of CPCA

Following Barnett (1983) and Horel (1984), the CPCA routine is briefly stated as follows.

In terms of the complex representation of a variable, propagating features are commonly described as

$$U_j(t) = u_j(t) + i\hat{u}_j(t) \quad (4-1)$$

The real part of (4-1), $U_j(t)$, is simply the original scale field where j denotes spatial position and t is time. The imaginary part, $i\hat{u}_j(t)$ where $i = \sqrt{-1}$ called the Hilbert transform, represents a filtering operation upon $u_j(t)$ in which the amplitude of each spectral component is unchanged but its phase is advanced by $\pi/2$.

After a complex data matrix is generated, the eigenvalues and eigenvectors of the complex cross-correlation matrix can be determined. If the complex data are converted into normalized anomalies by subtracting the mean and dividing by the standard deviation at each spatial position, then the correlation between the j th and k th position is:

$$r_{jk} = \langle U_j(t) * U_k(t) \rangle_t \quad (4-2)$$

where the asterisk $*$ denotes complex conjugation and $\langle \dots \rangle_t$ indicates a time average. The CPC approach compresses the information contained in the correlation matrix into relatively few complex eigenvectors with elements e_{jn} and complex principal components $P_n(t)$. Since the correlation matrix is Hermitian, it possesses real eigenvalues λ_n .

The observation $U_j(t)$ can be represented as a sum of the contributions from the N principal components:

$$U_j(t) = \sum_{n=1}^N e_{jn} * P_n(t) \quad (4-3)$$

The complex principal components are normalized too, *i.e.* $\langle P_n(t) * P_m(t) \rangle_t = \delta_{nm}$, and the complex eigenvectors are orthogonal, *i.e.* $\langle e_{jn} * e_{jm} \rangle_j = \lambda_n \delta_{nm}$. An element, e_{jn} , of the n th complex eigenvector can be interpreted as:

$$e_{jn} = \langle U_j(t) * P_n(t) \rangle_t = s_{jn} e^{i\theta_{jn}} \quad (4-4)$$

Hence e_{jn} is the complex relation between j th time series and n th principal component where s_{jn} is the magnitude of the correlation and θ_{jn} is the phase.

It is possible to reconstruct the portion of each complex time series which is explained by the n th component:

$$U'_j(t) = e_{jn} * P_n(t) \quad (4-5)$$

Since the real and imaginary parts of (4-1) are a Hilbert transform of one another, in theory, the real part can be considered alone. For further discussion, refer to Horel (1984).

Analysis Results

Of each profile, a section from the sand dune to the sand bar was chosen. Each profile was analyzed by both PCA and CPCA. Some results are listed in Table 4.

Table 4						
Percentage of Variation Explained by Principal Components						
Profile	Variation Explained by Principal Components (%)					
Number	1st PC	2nd PC	3rd PC	1st CPC	2nd CPC	3rd CPC
NJ00+2/3(097)	61.41	16.22	9.98	68.71	18.61	7.92
Cumulate	61.41	77.63	87.61	68.71	87.32	95.24
NJ0 (100)	32.25	25.52	3.48	51.52	15.16	13.38
Cumulate	32.25	57.67	61.15	51.52	76.68	90.06
NJ0+1/3 (103)	32.22	21.96	20.20	46.28	30.11	13.32
Cumulate	32.22	54.18	74.38	46.28	76.39	89.51

Apparently, the principal components derived from CPCA have better abilities to describe the variation. For each profile, the first two complex components can explain as much as the first three conventional components. The first three complex components can explain as much as 90% of the variation.

Using (4-3) and (4-5), the variation in profile can be reconstructed by principal components. Figure 9a, 9b and 9c show that the reconstructed results are well fitted to the observed data.

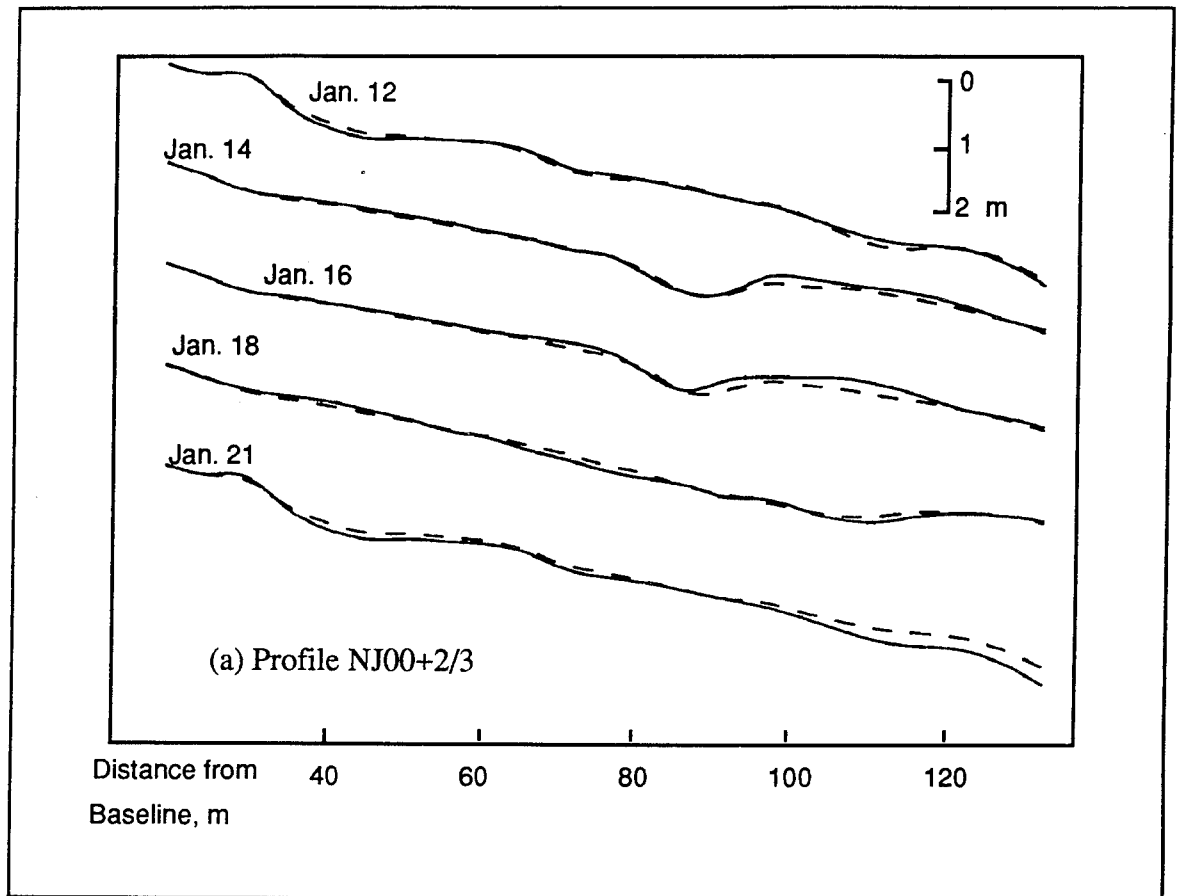


Figure 9. The observed data (solid lines) versus the reconstructed results (dash lines) derived from the first and second complex principal components (Sheet 1 of 3)

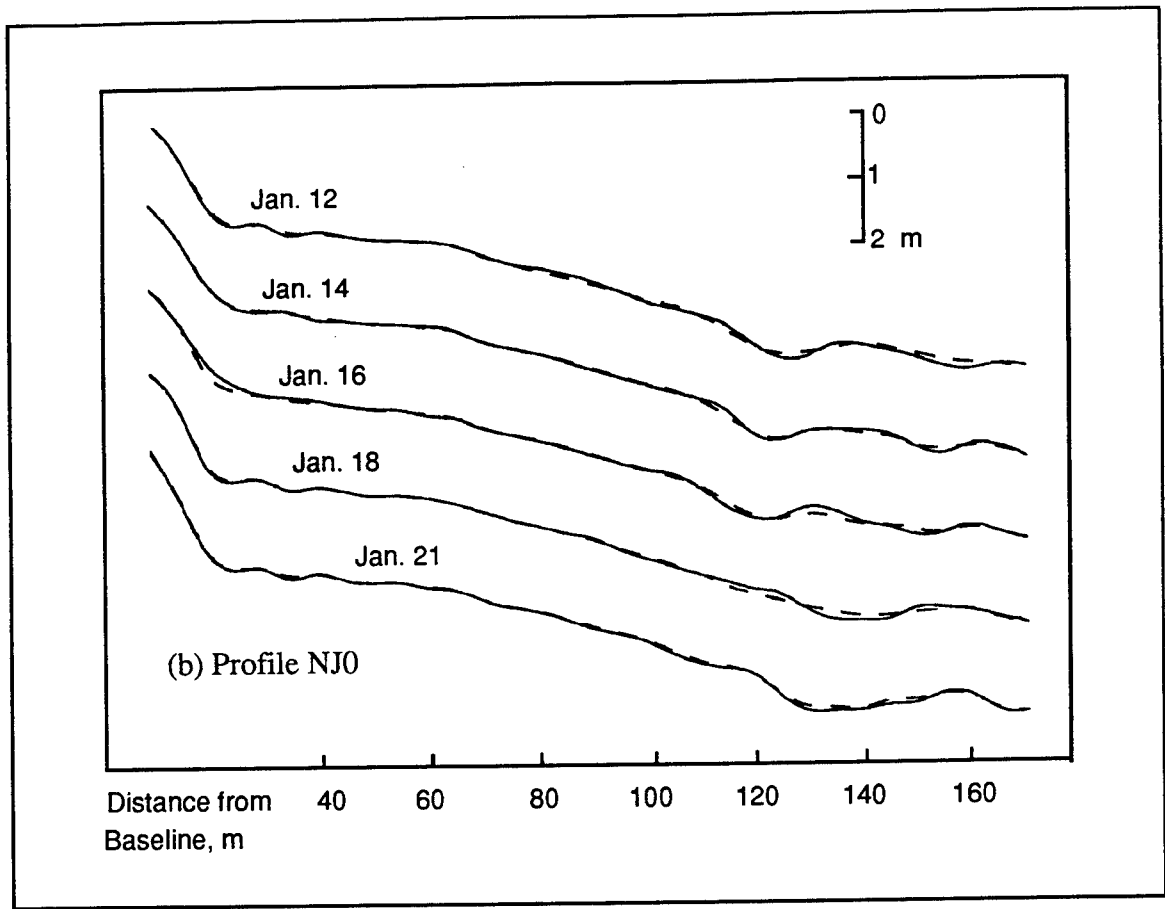


Figure 9. (Sheet 2 Of 3)

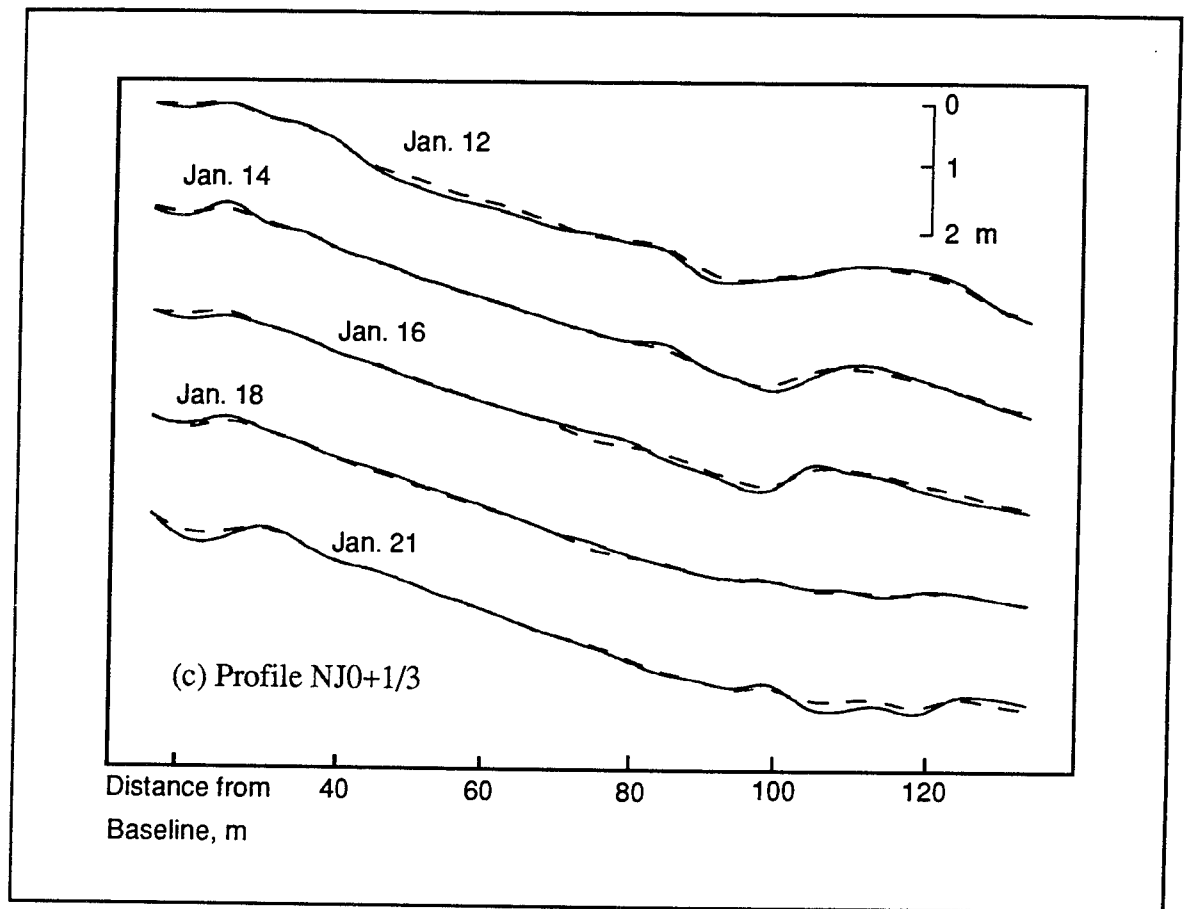


Figure 9. (Sheet 3 of 3)

5 Principal Component Analysis of Volume Changes

Choosing Volume Variations as Variables

As discussed in the last part, the application of PCA in coastal study is focused on the morphology variations. By analyzing the changes of elevations at certain grid points, PCA can describe the variation of a beach profile with time.

In order to detect the spatial variation in the alongshore direction, many attempts have been made by means of dealing with the intertidal slopes (Losana *et al.* 1991), using CPCA to analyze longshore profile (Liang and Seymour 1991), or introducing a three-mode PCA (Medina *et al.* 1992). In many cases, the results of these techniques are not easy to explain.

In this study, a new variable, the volume change, is selected to be analyzed by PCA. The variation in each profile is compressed to only one variable instead of the changes in elevation at many grid points. Therefore, the variation alongshore will be indicated.

In practice, changes of volume in certain areas or profiles are more meaningful for engineering projects. With the ability to describe and to predict the volume changes, PCA is expected to have wider use in coastal studies.

Results and Discussion

The data set used in this analysis consists of three variables. Each variable, the volume change in a certain profile, is a time series (Figure 10). Because the size of the data set is small, the conventional PCA attained satisfactory results (Table 5).

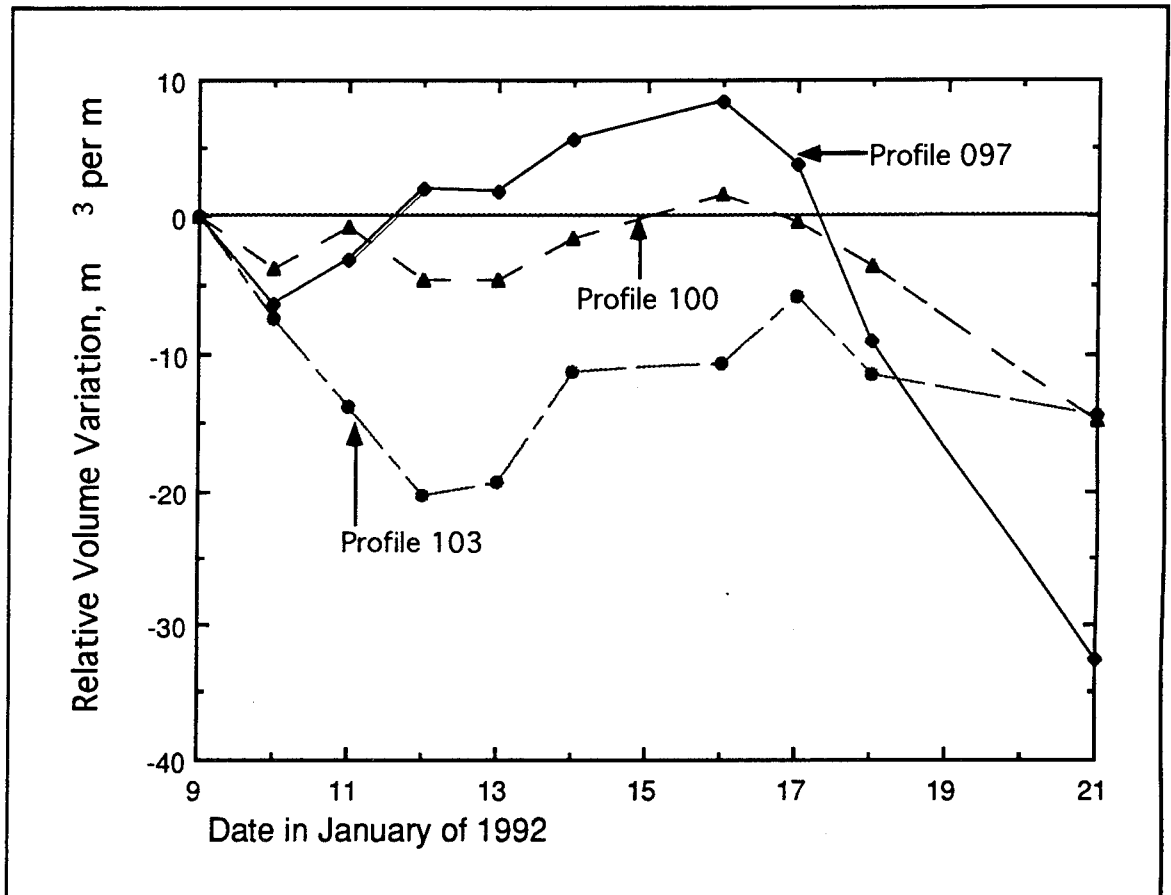


Figure 10. Volume changes in three profiles near the north jetty, January 9 to January 21, 1992

Table 5 Variation In Volumes Explained by Principal Components			
Principal Component	1st PC	2nd PC	3rd PC
Variation Explained (%)	69.58	29.22	1.20
Cumulate (%)	69.58	98.80	100.00

The first two components can explain almost 100% of the variation. It proved that, even for a data set of small size, PCA is still capable of compressing the variability of the data set into fewer modes.

To detect the spatial variation in the longshore direction, the correlations between every component and every variable were calculated. Results showed that the first component, which explained about 70% of the total variation, was well fitted to the volume changes in profile NJ0 (Figure 11a); and the second component, explaining about 30% of the variation, was well fitted the volume changes in profile NJ0+1/3 (Figure 11b). It implied that the variation in these two profiles can represent the total variation over this section.

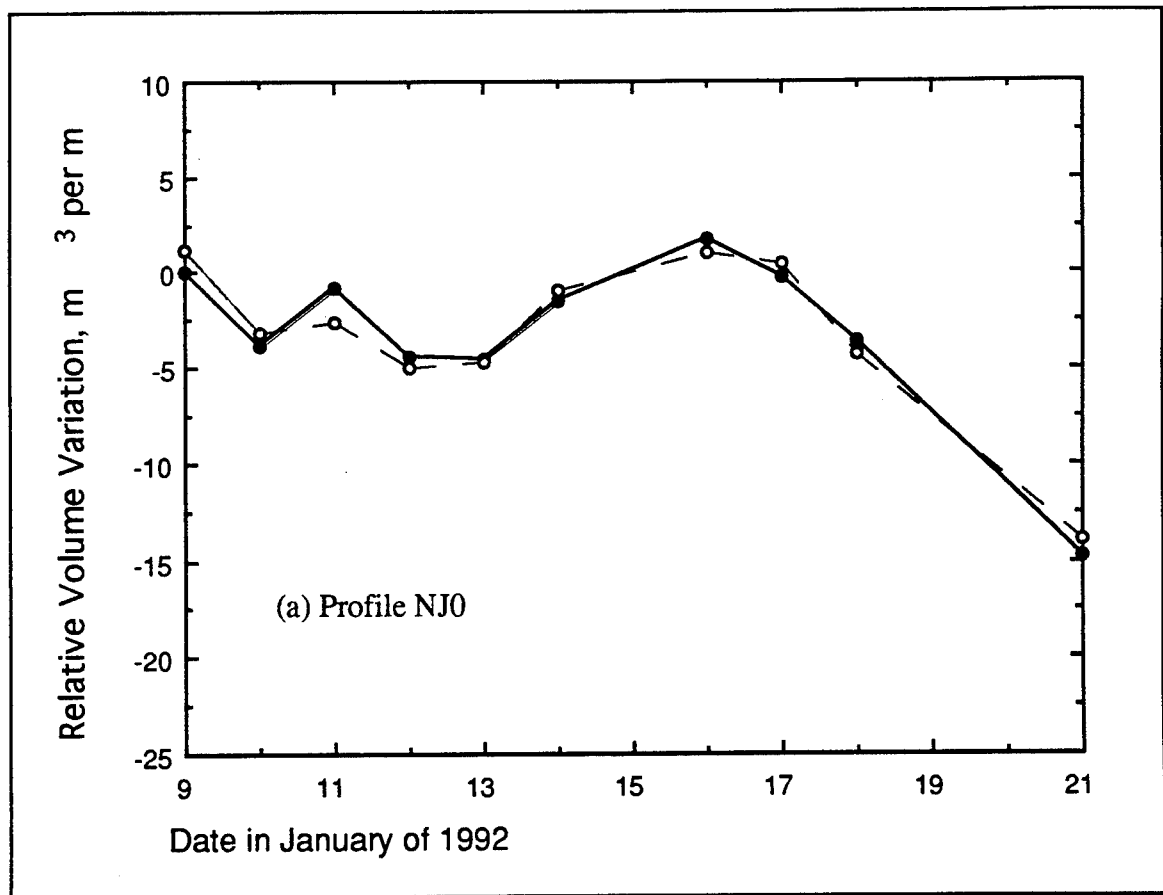


Figure 11. Volume changes (solid line) in two profiles versus the first or second principal component (dash line) (Continued)

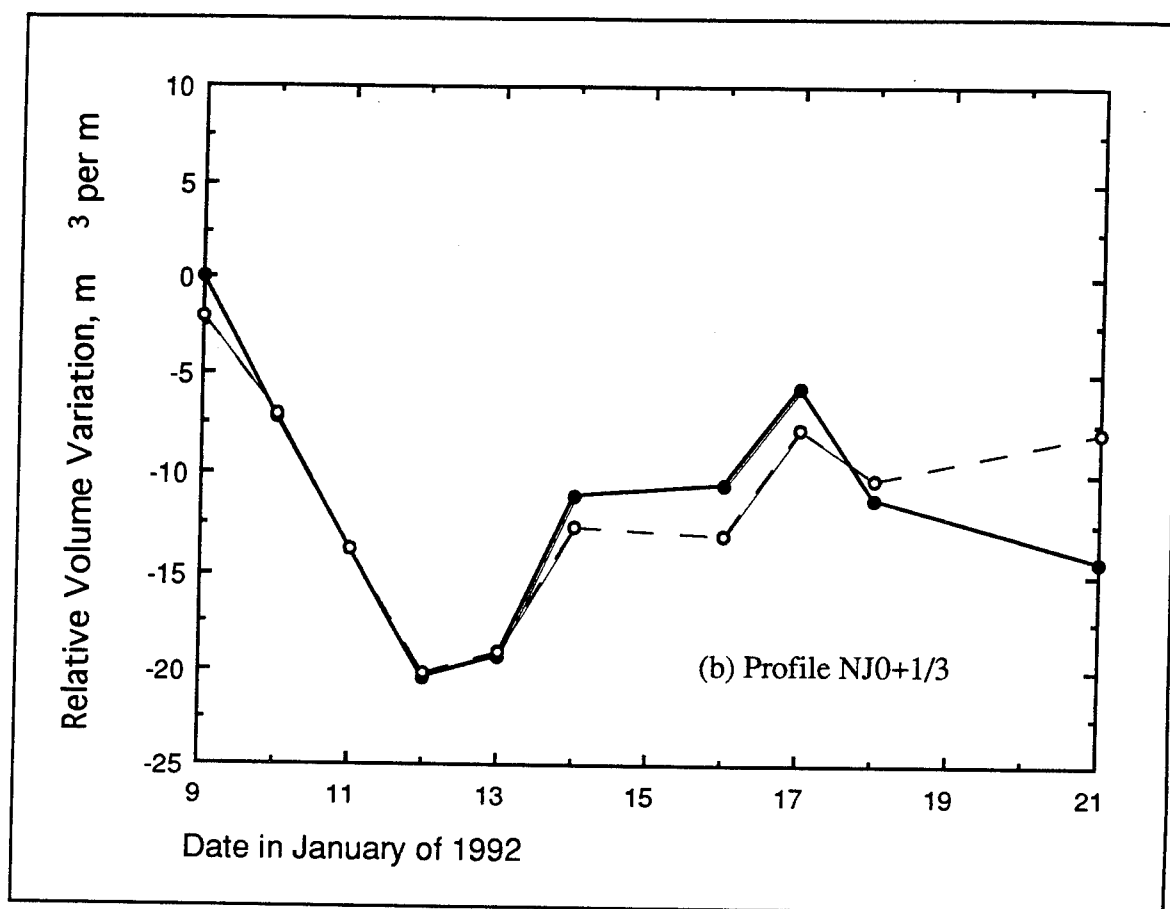


Figure 11. (Concluded)

6 Conclusions

In terms of the long-term variation, the shoreline in the north section is accretional. From 1984 to 1990, an area of 63,000 m² was gained within the north section.

Some severe erosion can be caused by storm. In a 270-m by 140 m area between NJ00+2/3 and NJ0+1/3, the sediment volume decreased more than 5,000 m³ in 12 days.

Complex PCA was applied to analyze a fast-moving bar event. It showed significant advantages over the conventional PCA. Using fewer components, CPCA can explain more variations. The results of reconstruction by CPCA well reflected the variation in the observed data set.

One new type of variable, the volume changes in profiles, was selected for principal component analysis. Using the results, the variation alongshore was detected. Further use of this method is expected to be fruitful.

The principal components derived either by PCA or by CPCA are meaningful predictors while combined with some selected dynamics parameters. Since a great amount of data about waves, currents and sediments was collected by this project, further study should include the prediction to the long-term or short-term variation in nearshore morphology and sediment volume by means of principal component analysis.

References

- Aronow, S. and Kaczorowski, R. T. (1985). "Texas," *The world's coastline*, van nostrand reinhold, New York, 129-146.
- Aubrey, D. G., Inman, D. L., and Winant, C. D. (1980). "The statistics prediction of beach changes in southern California," *Journal Geophysics Research*, 85(C6), 3264-3276.
- Barnett, T. P. (1983). "Interaction of the monsoon and Pacific trade wind systems at interannual time scale. Part I: The equatorial zone," *Mon. Wea. Rev.*, 111, 756-773.
- Birkemeier, W. A. (1984a). "Time scales of nearshore profile changes," *Proc. 19th International Coastal Engrg. Conf.*, ASCE, Houston TX, 1507-1521.
- Birkemeier, W. A. (1984b). "A User's guide to ISRP: The interative survey reduction program," Technical Report CERC-84-1, US Army Engineering Waterways Experiment Station, Vicksburg, MS.
- Crowson, R. A., Birkemeier, W. A., Klein, H. M. and Miller, H. C. (1988). "Superduck nearshore processes experiment: Summary of studies, CERC field research facility". Technical Report CERC-88-12, US Army Engineering Waterways Experiment Station, Vicksburg, MS.
- Curry, J. R. (1960). "Sediments and history of Holocene transgression, continental shelf, Northwest Gulf of Mexico," *Recent sediments, northwest Gulf of Mexico*, Am. Assoc. Petroleum Geologists, 221-266.
- Hayes, M. O., (1965). Sedimentation on a semiarid, wave-dominated coast (south Texas) with emphasis on hurricane effects, Ph.D. diss., University of Texas at Austin, Texas.
- Horel, J. D. (1984). "Complex principal analysis: Theory and examples," *J. Climate Appl. Meteor.*, 23, 1660-1673.

- LeBlanc, R. J. and Hodgson, W. D. (1959). "Origin and development of the Texas shoreline," *Gulf Assoc. Geol. Soc.*, 9, 197-220.
- Liang, G., and Seymour, R. J. (1991). "Complex Principal Component analysis of wave-like sand motions," *Coastal sediments '91*, ASCE, Vol II, 2157-2186.
- Losada, M. A., Medina, R., and Roldan, A. J. (1991). "Historical evolution and morphological analysis of 'el puntal' spit, santander (Spain)," *J. Coastal Research*, 3, 711-722.
- MaGowen, J. H. and Brewton, J. L. (1975). "Historical changes and related coastal processes, gulf and mainland shorelines, Matagorda Bay area, Texas," University of Texas at Austin, Bureau of Economic Geology, Texas.
- Medina, R., Vidal, C., Losada, M. A., and Losada, I. J. (1992). "Three-mode principal component analysis of bathymetric data, applied to Playa Castilla (Huelva, Spain)," *Proc. 23rd international coastal enrg. conf.*, ASCE, in press.
- Seymour, R. J. (1989). "Cross-shore transport," *Nearshore sediment transport*, Plenum Press, New York, 273-286.
- Wadsworth, A. H. Jr. (1966). "Historical delatation of the Colorado River, Texas," *Delta in their geologic framework*. Houston Geology Society, 99-106.
- Wallace, J. M. and Dickson, R. E. (1972). "Empirical orthogonal representation of time series in the frequency domain, Part I. Theoretical considerations," *J. Appl. Meteor.*, 11, 887-892.
- Wilkinson, B. H. and Basse, R. A. (1978). "Late Holocene history of the central Texas coast from Galveston Island to Pass Cavallo," *Geol. Soc. Am. Bull.*, 89, 1592-1600.
- Winant, C. D., Inman, D. L., and Nordstrom, C. E. (1975). "Description of seasonal beach changes using empirical eigenfunctions," *Journal Geophysics Research*, 80(15), 1979-1986.

Appendix A

Calculation Procedures for Sediment Volume Changes

In order to calculate the change for a profile from time t to $t+1$, the envelope of them is divided into n small trapezoids (Figure A1), the heights of the trapezoids are l_1, l_2, \dots, l_n , respectively. The area of i th trapezoid, ΔA_i , is estimated as:

$$\Delta A_i = \frac{1}{2}(\Delta H_{i-1} + \Delta H_i)l_i \quad (A1)$$

where ΔH_{i-1} and ΔH_i are the two sides of the i th trapezoid.

The area change between t and $t+1$ is

$$\Delta A = \sum_{i=1}^n \Delta A_i \quad (A2)$$

If all the l_i 's is uniform and equal to l , then

$$\Delta A = (\frac{1}{2} \Delta H_0 + \Delta H_1 + \Delta H_2 + \dots + \Delta H_{n-1} + \frac{1}{2} \Delta H_n)l \quad (A2a)$$

Hence, Δv , the volume change in a unit length alongshore is simply calculated as

$$\Delta v = \Delta A \times 1 \quad (A3)$$

If the longshore distance controlled by this profile is L_i , then ΔV_i , the volume change over this distance should be

$$\Delta V_i = \Delta v_i \times L_i \quad (A4)$$

The total volume changes over m profile is estimated as

$$V = \sum_{i=1}^m \Delta V_i \quad (A5)$$

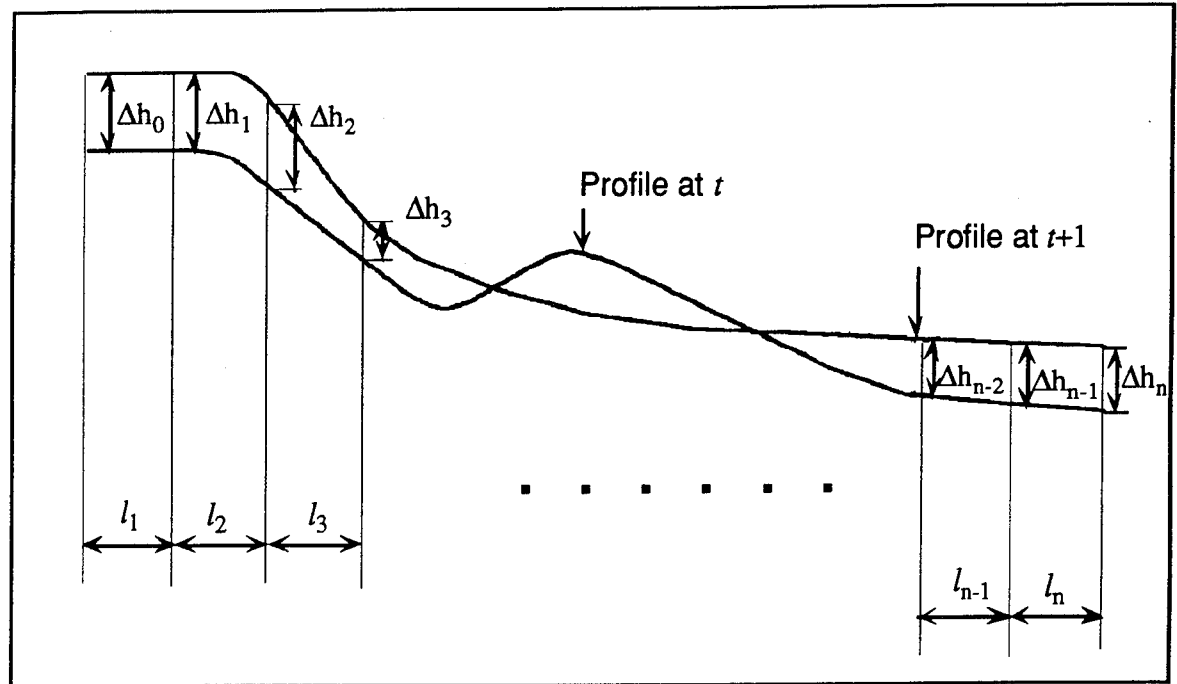


Figure A1. Schematic of calculating volume changes in a profile

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE August 1995	3. REPORT TYPE AND DATES COVERED Final report	
4. TITLE AND SUB TITLE Shoreline and Sediment Volume Changes at the Colorado River Mouth, Texas			5. FUNDING NUMBERS WU 22113	
6. AUTHOR(S) Guoxiong Liang				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Scripps Institution of Oceanography University of California, San Diego La Jolla, CA 92093-0222			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers, Washington, DC 20314-1000; U.S. Army Engineer Waterways Experiment Station 3909 Halls Ferry Road, Vicksburg, MS 39180-6199			10. SPONSORING/MONITORING AGENCY REPORT NUMBER Contract Report CERC-95-2	
11. SUPPLEMENTARY NOTES Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Shoreline change at the Colorado River mouth, Texas, was estimated based on survey results from 1990 to 1992 and some historic data. In terms of the long-term variation, the shoreline in the north section is accretional. From 1984 to 1990, an area of 63,000 m ² was gained within the north section. On the other hand, some severe erosion can be caused by storms. Complex PCA was applied to analyze a fast-moving bar event. It showed significant advantages over the conventional PCA. Using fewer components, CPCA can explain more variations. The results of reconstruction by CPCA reflected the variation in the observed data set well. Volume changes in profiles were selected as variables for principal component analysis. Using the results, variation alongshore was detected. Further use of this method is expected to be fruitful.				
14. SUBJECT TERMS Principal component analysis Sediment volume changes Shoreline change			15. NUMBER OF PAGES 38	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	